



WATER-CABLE BARRIER™

MASH ✓[®]
Tested Passed
and Eligible

TraFFix Water-Cable Barrier

- TraFFix Water-Cable Barrier has been MASH Tested, Passed and Eligible at TL-1, 31 mph and TL-2, 43.5 mph levels.
- Molded in galvanized steel cables (3) strengthens water-cable barrier to resist vehicle penetration during an impact.
- Double wall knuckle design minimizes breakage at hinge points.
- Durable polyethylene plastic with ultra violet additives resist fading, cracking and breaking.
- Hinge design allows for a 30-degree pivot between sections.
- Large 8" fill hole speeds filling process, includes twist-lock plastic cap.
- Tamper resistant, offset drain plug with coarse buttress thread eliminates cross threading and quickly screws in or out in only 2.5 turns.
- Includes one steel connection pin that allows sections to be linked together.
- Forklift/pallet jack slots for easy movement and placement.
- Standard orange color available - additional colors available for purchase only upon request.



"Commitment To Safety & Service"
Since 1973


Providing same day service from all our locations to Southern California, San Leandro/Bay Area, Bakersfield, Fresno, the San Joaquin Valley and the Las Vegas, Nevada areas.

310-327-5554
TrenchShoring.com

WATER-CABLE BARRIER MASH Tested, Passed and Eligible - TL-1 and TL-2

Specification

Water-Cable Barrier to be 72" long x 32" tall x 18" wide and molded from polyethylene. Water-Cable Barrier to be MASH tested, passed and eligible for TL-1, 31 mph and TL-2, 43.5 mph barrier applications. Individual wall shall weigh 100 lbs. including internal cables empty and 1,070 lbs. when filled. Three 3/8" diameter stranded steel cables are molded into the wall to contain the impacting vehicle during an accident. Standard color is orange. Water-Cable Barrier modules are connected together with galvanized steel T-pins passing through a double wall knuckle which minimizes breakage at hinge points. Water-Cable Barrier shall pivot up to 30 degrees when connected. Water-Cable Barrier to have 8" diameter fill hole for quick filling and a twist lock cap for closure. Water-Cable Barrier will have molded fork lift slots to provide easy movement. Drain plug to be centered on the modules to protect against cracking or breaking and have coarse buttress threads for quick removal and insertion. Water-Cable Barriers shall stack for easy movement and storage.

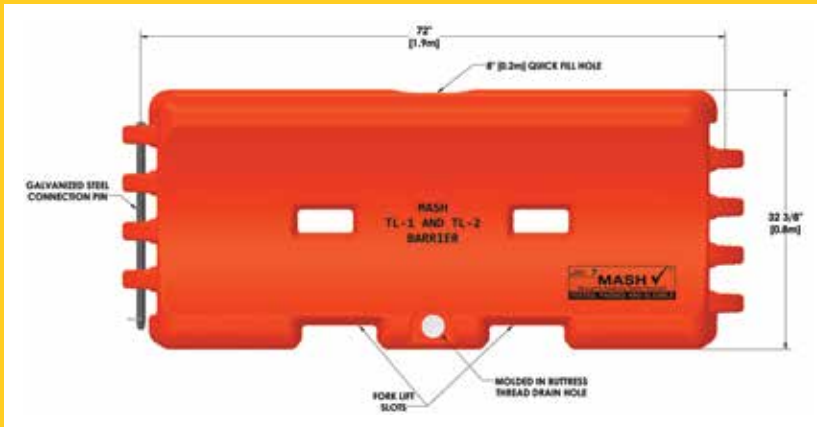

MASH & NCHRP 350 Eligibility Letters:

- MASH Eligible TL-1 Longitudinal Barrier - B-271
- MASH Eligible TL-2 Longitudinal Barrier - B-272
- NCHRP 350 Eligible TL-1 Barrier - B-130
- NCHRP 350 Eligible TL-3 Barricade - WZ-224

Specifications:

Length	72"	Weight (Filled with Water)	1,070 lbs.
Width	18"	Material	Polyethylene Plastic
Height	32"	Color	Orange
Weight (Empty)	100 lbs.		

Compton Corporate Office
206 N. Central Ave.
Compton, CA 90220
(310) 327-5554



"Commitment To Safety & Service"
Since 1973

Bakersfield
301 Lawson Rd.
Bakersfield, CA 93307
(661) 396-9160

Banning
1184 W. Lincoln St.
Banning, CA 92220
(951) 849-1611

Corona
325 N. Cota St.
Corona, CA 92880
(951) 734-4290

Fresno
88 N. Hughes Ave.
Fresno, CA 93706
(559) 691-4123

Fullerton
1400 E. Orangethorpe Ave.
Fullerton, CA 92831
(714) 879-1005

Lake Forest
20542 Pascal Way
Lake Forest, CA 92630
(949) 454-0858

Moorpark
13826 Princeton Ave.
Moorpark, CA 93021
(805) 529-4614

San Diego
9450 Dowdy Dr.
San Diego, CA 92126
(858) 530-2500

San Leandro
2371 Polvorosa Ave.
San Leandro, CA 94577
(510) 900-0595

Las Vegas, Nevada
4035 Flossmoor St.
Las Vegas, NV 89115
(702) 651-0920



TrenchShoring.com

MASH® copyright of Manual for Assessing Safety Hardware
Traffix Water-Cable Barrier™ is a registered trademark of
Traffix Devices Inc.
© 2021 Trench Shoring Company 10/19/21 WEB